POWER TOOLS

csseuro.com

sales@csseuro.com

CSS TRADING GROUP

CONTENTS

Drills, Batteries & Chargers 3

Circular Saws & Grinders 4

Circular Saws 4

Angle Grinders 4

Pressure Washers & Dust Extractors 5

Pressure Washers 5

Dust Extractors 6

Submersible Pumps 7

Cement Mixers 8

Cut-Off Saws 9

Generator 10

Combi Drill LXT®

DHP453

• 18V • 42 Nm • 0 – 1 300 min^{-1}

Combi drill with hammer action for demanding amateur builders

For screwdriving and drilling with or without hammer action, two power settings. Max. torque of 42 / 27 Nm. Suitable for light professional use or demanding amateur use

User benefits

- With impact mode, the tool can be used for drilling stone materials.
- All metal gear construction ensures high transmission durability
- Single sleeve keyless chuck enables easy bit installation/removal with one hand
- The rubber coating on the handle ensures a firm working grip
- Battery protection circuit protects against overloading, over-discharging and over-heating

Rotary Hammer

HR2630T

• 800 W • SDS-PLUS • 26 mm • 2.4 J

Three-mode rotary hammer with quick-change chuck

A compact and efficient rotary hammer compatible with SDS-PLUS bits. Suitable for impact and unstressed drilling, plus chipping. Motor capacity of 800 W and speed can be adjusted between 0 and 1 200 min-1 from a switch. Impact energy of 2.4 J and optimal drilling range of 8 – 18 mm in concrete. Max. drilling capacity of 26 mm in concrete.

Rotary Hammer

HR4511C

• 1 350 W • SDS-MAX • 45 mm • 9.4 J

Powerful dual-action combi hammer with anti-vibration technology for heavy-duty use

An efficient 1 350 W combi hammer with a unique AVT anti-vibration system for SDS-MAX blades. Masonry drilling capacity of 45 mm and impact energy of 9.4 J. With its drilling and chipping functions, this tool is an ideal choice for renovation and building work.

Rotary Hammer

HR4013C

• 1 100 W • SDS-MAX • 40 mm • 8.0 J

Efficient dual-action hammer with integrated anti-vibration technology

An efficient 1 100 W combi hammer with a unique AVT anti-vibration system for SDS-MAX blades. Masonry drilling capacity of 40 mm and impact energy of 8.0 J. With its drilling and chipping functions, this tool is an ideal choice for renovation and building work.

Battery Charger LXT®

- **BL1830B**
- **BL1840B**
- **BL1850B**
- **BL1860B**

• Li–ion • 18V

Li-ion battery for 18V LXT® tools

	Charging Time
BL1830B	24 minutes
BL1840B	36 minutes
BL1850B	45 minutes
BL1860B	55 minutes

Li-ion battery with a charge level indicator. Powerful general-use battery for 18V Makita LXT® tools.

Battery Charger LXT®

DC18RC

• Li–ion • 14,4 – 18V • DC18RC

Charger for 14,4V and 18V Li-ion batteries

Rapid charger for 14.4V and 18V LXT® slide-style batteries. Equipped with a cooling fan that cools the battery to enable faster charging. Charging optimised in terms of voltage, current and temperature. Charges a battery in 15-55 minutes, depending on the battery's capacity.

Circular Saws

Circular Saw LXT®

DSS611

• 18 V • 3 700 min- • 165 mm

18V LXT® Cordless saw that cuts at high rotational speed of 3,700 RPM . Saw's grip provides more control and comfort. Easy to adjust cutting depth with safety cover with calibration line. Aluminium base provides high quality and toughness for better work results. Bevel cuts from 0° to 45° for the most common cutting applications

Circular Saw

5903R

• 2 000 W • 4 500 min^{-1} • 235 mm

Efficient, high-capacity circular saw

An efficient and robust high-capacity circular saw with a 2 000 W motor and speed of 4 500 min-1 designed for professional use. Compatible with a blade with 235 mm diameter that achieves a max. cutting depth of 85 mm. All-ball bearing structure and motor ensure a long service life.

Angle Grinders

Angle Grinder

GA4530R

• 750 W • 115 mm • 11 000 min^{-1}

Mini-grinder with anti-restart feature for cutting and grinding

Grinder with anti-restart feature to prevent accidental and unexpected restart of the machine for improved safety. Slim motor housing with small circumference of 179 mm for improved grip. High quality motor with excellent heat resistance.

Angle Grinder LXT®

DGA452

• 18V • 115 mm • 11 000 min^{-1}

Powerful angled grinder

A 18V powerful cordless angle grinder. Standard angle grinder discs available. Slim body design for added comfort. Anti-restart function.

Angle Grinder LXT®

DGA463

• 18V • 115 mm • 3 000 – 8 500 min^{-1}

Powerful angle grinder

A 18V powerful cordless angle grinder. The Angle grinder can be connected to a dust extraction system with optional dust-collecting wheel cover. Anti-restart function.

Angle Grinder LXT®

DGA900

• 18V X2 • 230 mm • 6 000 min^{-1}

Efficient brushless tool with brake and safety switch underneath for cutting and grinding

A powerful, high-capacity brushless angle grinder with a 230 mm wheel for demanding professional use. A high 36V voltage is achieved with two 18V LXT® batteries. Constant speed electronics, overload protection and wheel brake for added safety. A safety switch underneath.

Pressure Washers

RE 90 Electric Pressure Washer

RE02 011 4541

Rated voltage	220-230 V	Min. water throughput	350 l/h	Cable length	5 m
Number of phases	1	Max. water throughput	440 l/h	Sound pressure level	80 dB(A)
Speed	21000 r/min	Max. water feed temp.	40 °C	Sound power level	90 dB(A)
Device weight without cable	8 kg [1]	Frequency	50-60 Hz	Vibration level, left	2.5 m/s² [3]
Max. pressure	130 bar [2]	High-pressure hose length	6 m	Vibration level, right	2.5 m/s² [3]

[1]operational [2]Maximum permissible system pressure

RE 100 Plus Control Electric Pressure Washer

RE02 011 4531

Rated voltage	220-230 V	Min. water throughput	350 l/h	Cable length	5 m
Number of phases	1	Max. water throughput	450 l/h	Sound pressure level	80 dB(A)
Speed	20000 r/min	Max. water feed temp.	40 °C	Sound power level	89 dB(A)
Device weight without cable	9 kg [1]	Frequency	50 Hz	Vibration level, left	2.5 m/s² [3]
Max. pressure	150 bar [2]	High-pressure hose length	7 m	Vibration level, right	2.5 m/s² [3]

[1]operational [2]Maximum permissible system pressure [3]K value in accordance with Directive 2006/42/EC = 1.5 m/s² (RE 90), 2.0 m/s² (from RE 100), with flat jet nozzle

RE 110 Plus Electric Pressure Washer

950 011 4535

Rated voltage	220-230 V	Min. water throughput	380 l/h	Cable length	5 m
Number of phases	1	Max. water throughput	430 l/h	Sound pressure level	73 dB(A)
Speed	2850 r/min	Max. water feed temp.	40 °C	Sound power level	85 dB(A)
Device weight without cable	20.3 kg [1]	Frequency	50 Hz		
Max. pressure	150 bar [2]	High-pressure hose length	8 m		

[1]operational [2]Maximum permissible system pressure

RE 120 Plus Electric Pressure Washer

4950 011 4552

Rated voltage	220-240 V	Max. water throughput	480 l/h
Number of phases	1	Max. water feed temperature	40 °C
Speed	2850 r/min	Frequency	50 Hz
Device weight without cable	21.2 kg [1]	High-pressure hose length	9 m
Max. pressure	160 bar [2]	Cable length	5 m
Min. water throughput	400 l/h		

[1]operational [2]Maximum permissible system pressure

RE 130 Plus Electric Pressure Washer

4950 011 4562

Rated voltage	220-240 V
Number of phases	1
Speed	2850 r/min
Device weight without cable	21.2 kg [1]

Max. pressure	170 bar [2]
Min. water throughput	420 l/h
Max. water throughput	500 l/h
Max. water feed temp.	40 °C

Frequency	50 Hz
High-pressure hose length	9 m
Cable length	5 m

[1]operational [2]Maximum permissible system pressure

Dust Extractors

Dust Extractor Vacuum

VC2201M

• 110 V • 22 L • GYUPPA (Wet & Dry)

M- classed GYUPPA Wet & Dry vacuum cleaner for better dust management

A solid and compact wet/dry dust extractor of filter class M for general cleaning or use with a machine. 3-part self-cleaning filter and 22L stainless steel tank.

Dust Extractor Vacuum

VC4210M

• 1000 W • 250 mbar • 42 l • M

Large wet/dry dust extractor with 3-part self-cleaning filter for cleaning or use with a machine

A silent wet/dry dust extractor of filter class M with a large tank for general cleaning or use with a machine. A remote start system connection for electric tools. Equipped with a self-cleaning filter and a 42 l plastic tank.

Dust bag

122852-0

• 110 V • 22 L • GYUPPA (Wet & Dry)

M- classed GYUPPA Wet & Dry vacuum cleaner for better dust management

A solid and compact wet/dry dust extractor of filter class M for general cleaning or use with a machine. 3-part self-cleaning filter and 22L stainless steel tank.

ELITE 110 VOLT 2 INCH (50MM) DIRTY WATER SUBMERSIBLE PUMP

Product Code: SPK530M

110 Volt | 530 Watt Motor | 2 Inch (50mm) Outlet | Manual Switch | 250 Lpm | Max Head 11 Metres | Solids Up To 6mm

The Elite range of water pumps consist of the SPK range for pumping dirty water and for removing water residue down to 2mm. The new SPT range for pumping dirty water with solids up to 7mm are also available.

SPECIFICATION:

- Power Supply: 110v 50Hz
- Power Consumption: 530w
- Suction Type: Submersible
- Outlet Diameter: 50mm (2")
- Top Discharge
- Maximum Flow Rate: 250 l/m
- Maximum Water Lift Height: 11mtr
- Maximum Solids Diameter: 6mm
- Dimensions: 28.5 x 27.3 x 26.5cm (LxWxH)
- Weight: 13kg

BELLE MINIMIX 150 CEMENT MIXER

- **Model:** Minimix 150
- **Weight:** 55.50kg
- **Dimensions:** 1,211.00mm x 1,057.00mm x 1,227.00mm

Compact, heavy duty, professional tip-up Cement Mixer designed for professional and rental users. Built for site durability, these are quality, portable mixers for all small to medium building projects. The number one mixer choice for builders worldwide.

- Compact and portable for easy transportation.
- Mixes a full barrow load of concrete or mortar.
- Complete with barrow height swivel and stand.
- Full thermal overload protection.
- Proven robust and durable design.
- Extra thick drum with quick mix paddles.
- Heavy-duty sealed cast gearbox for longer life.
- Large choice of engines and electric motors to suit the user.
- Electric or petrol options available.
- Variable throttle on petrol variants.
- Enclosed Electric motor, sealed to IP45.
- CE compliant, with NVR (No Volt Release) safety power switch

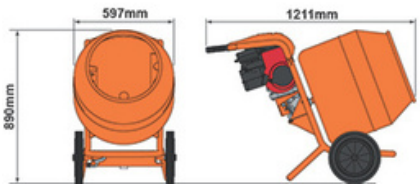

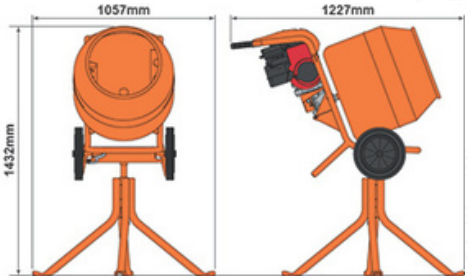

230V CEMENT MIXER, 160L

Built to high standards and robustly engineered, this cement mixer has a reliable IP45-rated motor for exceptional performance. The heavy duty drum is ideal for mixing concrete and mortar for small to medium-sized projects. Some assembly is required but once set up, it's light and portable and comes with a support stand and wheels for ease of use on building sites or at home. The mixer can be used on or off the stand.

- 160L drum capacity
- Supplied with a robust 4-leg stand and wheels
- 230V induction motor (650W)
- No volt safety switch
- Mixer can be used on or off the stand
- Full assembly required

Capacity	160L
Input Voltage	230V
Motor Wattage	650W
Drum Rotation Speed	28RPM
Drum Opening	400mm
Stand Type	4 leg stand
Dimensions	W 790mm x D 1300 x H 1335mm
Weight	59kg

Stihl TS 410 30cm/12" Cut-off Saw

Long-life filter system with cyclone pre-separation makes on site maintenance unnecessary. Extremely low vibration levels (3.9m/s^2). High performance engine with stratified charge system. Compact design and optimised balance for excellent cutting and guide characteristics. For use with 300mm cutting wheel. ElastoStart, primer pump and decompression valve. Bayonet filler cap for tool free opening.

Stihl TS 420 35cm/14" Cut-off saw

Long-life filter system with cyclone pre-separation makes on site maintenance unnecessary. Extremely low vibration levels (3.9m/s^2). High performance engine with stratified charge system. Compact design and optimised balance for excellent cutting and guide characteristics. Fitted as standard with a powerful 14" / 350mm composite resin cutting wheel.

Stihl TSA 230.1 (AP) Cut-Off Saw 23cm/9"

The TSA 230.1 is a 9" (230 mm) battery-powered cut-off machine. It's exceptionally easy to handle thanks to its compact and well-balanced design and is designed for professionals working in construction, hardscaping and pipework – making it an ideal choice for making short cuts on paving stones, brickwork and steel.

Stihl TS 480i 30cm/12" Cut-off saw

Innovative 3.9kW cut-off machine with electronically controlled fuel injection.

Unique STIHL Injection engine technology for 300 mm cutting wheels. Easy to start; powerful torque. Fully-equipped with long-life air filter system and electronic water control.

Stihl TS 500i 35cm/14" Cut-off saw

Innovative 3.9kW cut-off machine with electronically controlled fuel injection

Unique STIHL Injection engine technology for 350 mm cutting wheels. Easy to start; powerful torque. Fully-equipped with long-life air filter system and electronic water control.

Stihl FW 20 Cart

The STIHL FW 20 cart turns all hand-operated STIHL cut-off machines into easily manoeuvrable cutting tools. With little effort you can now produce clean edges over long cuts, with depths accurate to a millimetre. Includes 'Quick mounting system conversion kit'.

Draper Expert Petrol Generator, 2000W

Product Code: **87059**

- Powered by 4-stroke engine
- Easy pull recoil start
- Steel tubular frame
- Dual voltage output 220/110V
- 12V DC output
- Fitted with oil and fuel resistant anti-vibration mounts
- Engine low oil shutdown
- Supplied with 12V charging lead and basic toolkit
- Compatible with E5 and E10 fuel

Draper Expert Petrol Generator with Wheels, 2500W

Product Code: **87088**

- Powered by 4-stroke engine
- Easy pull recoil start
- Steel tubular frame
- Dual voltage output 230V/110V
- 12V DC output
- Fitted with oil and fuel resistant anti-vibration mounts and two wheels
- Supplied with 12V charging lead and basic toolkit
- Compatible with E5 and E10 fuel

Draper Expert Petrol Generator with Wheels, 4000W

Product Code: **23984**

- Powered by 4-stroke engine
- Recoil and electric start
- Steel tubular frame
- Dual voltage output 110/230V
- 12V DC output
- Fitted with oil and fuel resistant anti-vibration mounts and two wheels
- Supplied with 12V charging lead and basic toolkit
- Compatible with E5 and E10 fuel

Draper Expert Petrol Generator with Wheels, 5000W

Product Code: **23987**

- Powered by 4-stroke engine
- Recoil and electric start
- Steel tubular frame
- Dual voltage output 110/230V
- 12V DC output
- Fitted with oil and fuel resistant anti-vibration mounts and two wheels
- Supplied with 12V charging lead and basic toolkit
- Compatible with E5 and E10 fuel

Draper Expert Petrol Generator with Wheels, 5000W

Product Code: **16143**

- Powered by 4-stroke engine
- Recoil and electric start
- Steel tubular frame
- Dual voltage output 110/230V
- 12V DC output
- Fitted with oil and fuel resistant anti-vibration mounts and two wheels
- Supplied with 12V charging lead and basic toolkit
- Compatible with E5 and E10 fuel

CSS Europe GmbH
Berck-sur-Mer Straße 20a,
53604 Bad Honnef,
Deutschland

sales@csseuro.com

csseuro.com

CSS TRADING GROUP

Building Tommorrow, Supplying Today!